

# JIPA JUMP 251 (250I)



## Technical specification:

|                       |                        |
|-----------------------|------------------------|
| Capacity:             | 250 liters – DIN 18857 |
| Capacity GN:          | 4 x GN 1/1             |
| Bottom pan dimension: | 1429 x 580 mm          |
| Depth:                | 340 mm                 |
| Cooking surface:      | 83 dm <sup>2</sup>     |
| W x D x H:            | 2065 x 850 x 1030 mm   |
| Power-connected load: | 49,2 kW                |
| Voltage:              | 3 N AC 400 V           |
| Fuse:                 | 3 x 63 A               |
| Weight:               | 495 kg                 |
| Water inlet:          | R3/4                   |
| Water outlet:         | DN - 50                |

## Technology:

Boiling  
Gentle boiling  
Deep frying  
Frying  
Braising  
Low temperature cooking  
Grilling  
Confit  
Sous – vide  
Overnight cooking  
Temperature: 30°C–250°C.

## Functions:

Automatic basket lifting  
12" colour touch screen with intuitive control  
Memory of 800 programs with 12 steps  
Language mutation  
Possibility to create own programs  
Actual values visible on screen  
Sensor temperature control  
Lock screen  
Error list on display  
Technical and service information


## Construction:

- Base frame - AISI 304, minimum thickness 3 mm
- Frame cover - AISI 304
- Cooking pan AISI 316, both sides welded
- Heating system JPX 17 equal and stable heating
- Preheating to 180 °C till 3 minutes
- Robust double insulated cover with automatic electric lifting
- Steam exhaust through the chimney in cover
- Central water supply, drainage and power connections from wall or floor
- Connection kit for connection more units together
- Service access from the front and top sides
- Certificates CE, TÜV-SÜD

## Standard Equipment:

- Automatic water filling system
- Liquid level gauge
- 2 speeds of tilting
- Multipoint core probe
- Integrated drain in bottom with electronic closing/opening system
- Automatic basket lifting – possibility of cooking in baskets with closed cover
- Electronic cover with safety control
- Safety sensor for basket lifting arm
- Integrated retractable shower
- Integrated socket 230 V /16 A
- USB port– backup and data transfer
- HACCP data
- Internet connection




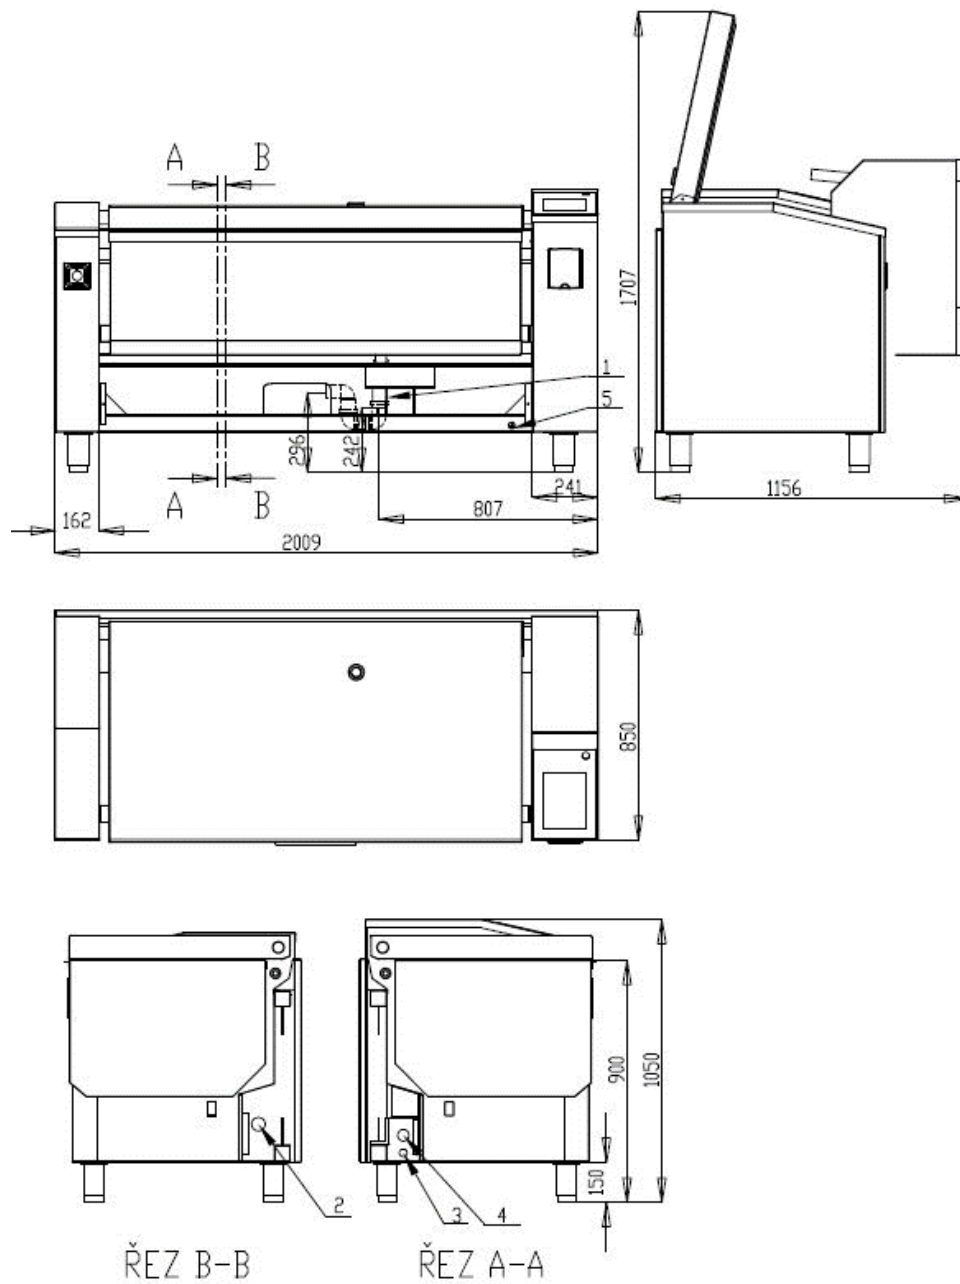

- ① Drain DN 50
- ② Water connection
- ③ Electro connection
- ④ Ethernet socket RJ 45
- ⑤ Ground

## Recommended accessories:

- Spatula big
- Spatula for omelettes
- Basket extension arm
- Cooking and frying baskets
- Sieve
- Spaetzle sieve

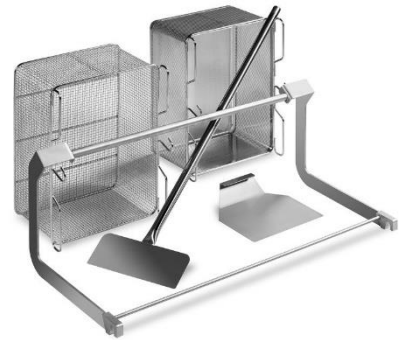

- Oil filtration trolley



- Battery – powered lifting trolley



- Grate for NT 1/1

